

TECHNICAL SPECIFICATIONS

BOURG BINDER BB3202 EVA / HOT MELT / PUR-COMPACT

Media

Maximum speed	650 cycles/hour 350 books/hour
---------------	-----------------------------------

COVER IN OFF-LINE/NEAR-LINE/IN-LINE MODES

Cover weight	80 to 300 gsm
--------------	---------------

CONTENT*

* Padding mode is not available with PUR version due to cure time

Milling depth	0 to 3 mm (0 to 0.11 in)
Paper weight	60 to 200 gsm

Physical

Dimensions BB3002 (L x W x H)	202 x 241 x 150 cm (79.52 x 94.49 x 59.05 in)
Dimensions BBC (L x W x H)	150 x 85 x 145 cm (59.05 x 33.46 x 57.08 in)
Weight BB3002 + BBC	931 kg (2053 lbs)
Glue temperature (EVA)	130°C to 180°C (256°F to 356°F)
Cover station capacity (cover pile height)	80 mm (3.15 in)
BBR capacity	700 mm (27.6 in)

Electrical

Power supply of BB3002 Off-Line	208V/220V ±10%, 60Hz, 3 phase delta, 12A
	220V/230V ±10%, 50Hz, 3 phase delta, 12A
	380V/400V ±10%, 50Hz, 3 phase star, no neutral needed, 12A
Power supply of Bourg Book Compiler	120V ±10%, 60Hz, 5A
	230V ±10%, 50Hz, 2A


Options / Accessories

Barcode	Bourg Perforating Rotating Folding (BPRF)
First aid kit	Bourg Sheet Feeder (BSF)
6 meters long vacuum tube	Book Trimmer CMT-130 (CMT-130)
Double cover detection	Three-Knife Trimmer CMT-330C (CMT-330C)
Bourg Box Communication Interface	+ Various printers/presses & partner products
Bourg Book Reception Module (BBR)	

MEDIA SIZES


Perfect binding mode

In-Line mode



Padding mode*

In-Line mode

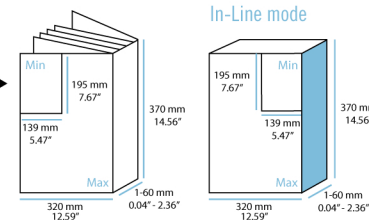

FOR MORE TECHNICAL INFORMATION, VISIT CPBOURG.COM OR CONTACT YOUR LOCAL DISTRIBUTOR

Legal notice: All technical information are subject to change without prior notice. As C.P. Bourg's products are always evolving to meet your needs, please visit our website www.cpbourg.com for the most updated information.